


Underfloor Heating

Komfort Actuator

- Small overall width only 37mm suitable for marginal valve distances
- Audited quality according to IEC 60730-2-14 confirmed by TUV Rheinland
- Durable and reliable through high quality materials Made in EU
- High protection class IP 54 according to EN 60529
- Energy-efficient through low power input
- Easy installation without tools



- 230v, 24v and 120v available
- 100 N Force
- 4mm Stroke
- Good visible display
- Normally closed NC"
- M30x 1.5 and M28x 1.5
- Noiseless

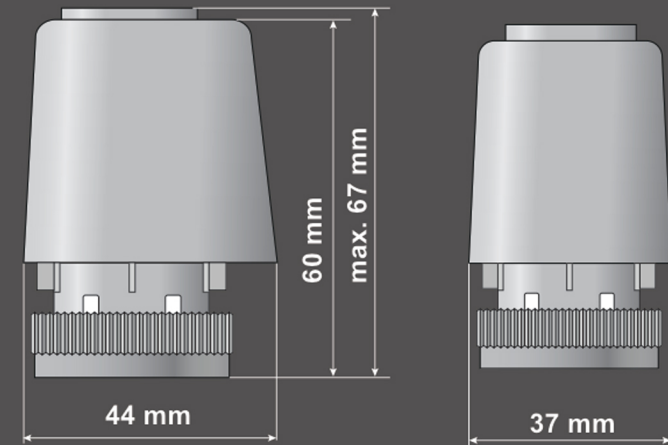

Versions	NC = Normally Closed
Voltage	230 V AC +10%.....-10% (50 Hz - 60 Hz), 24VAC/DC, +20%....-10%(0Hz-60Hz)
Operating current	2W
Max. inrush current	300 mA 230V, 470 mA 24V
Operating power	8 mA 230V, 85 mA 24V
Closing and opening times	ca. 170 sec.
Stroke	4mm
Force	100 N
Fluid temperature	max. 100 °C
Storage temperature	-25 °C to +60 °C
Ambient temperature	max. 60 °C
Degree / Class of protection	IP 54
Degree of contamination	II
CE-conformity according to	EN 60730
Connection cable / length	PVC, 2x0,75 mm , length 0,8 m, RAL 7035
Adaptation	M30x1,5, M28x1,5 / different closing points
Material	PE
Housing color	RAL 7035
Over-tention category	II
Over-tention stability	Min. 2500 V according to EN 60730-1
Ball indentation	90 °C